


SECTION 122.01

FIRE SERVICES (TYPICAL) CASE 1

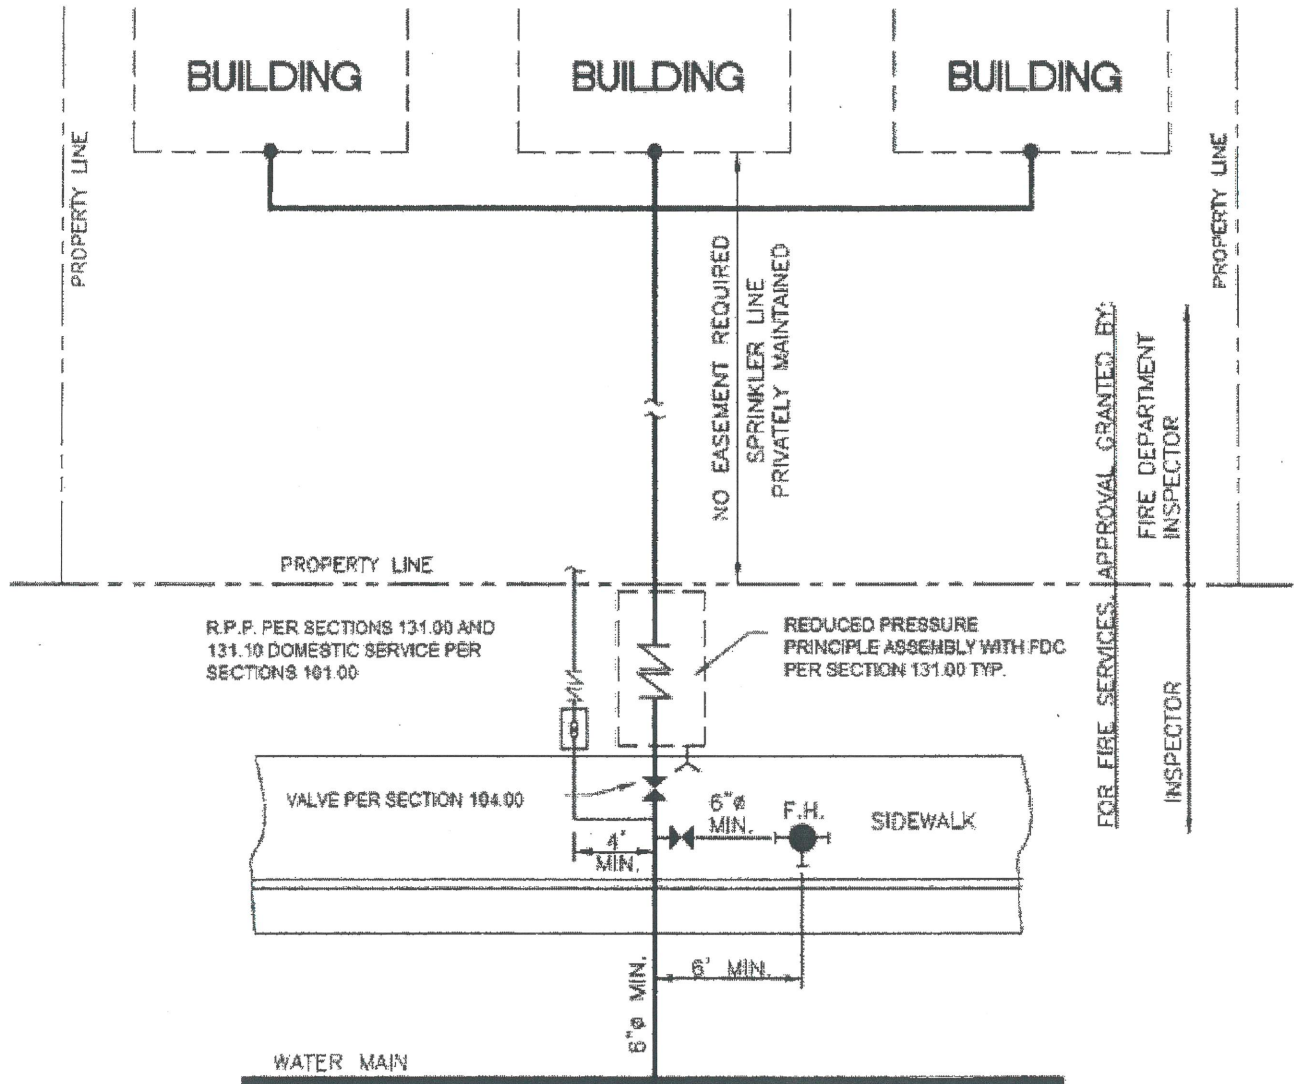

CASE I

FIRE SERVICE WITH SPRINKLER SYSTEM ONLY

NOTES:

1. Fire Department Connections (FDC) shall be "FM" or "UL" listed.
2. Distance between FDC and fire hydrant shall be 40 feet maximum unless approved by the Fire Department.
3. When valves are required on fire service line, indicator type valves shall be "FM" or "UL" listed and shall be approved both by the District Engineer and the Fire Department.
4. Fire service piping and appurtenances shall be inspected within the right-of-way by the District Inspector and on private property by the Fire Department Inspector.
5. Locating wire shall be installed with all non-metallic piping and shall include pipe run to hydrant.

Section 122.01 – Fire Services (Typical) Case 1
August 19, 2020
Centerville CSD

Approved :


District Manager